
Add custom fields on server add form

261 Manu Chacko October 23, 2024 Productivity & Efficiency Features, Technical 11155

How to add custom fields on the server add form in Ezeelogin?


Overview: This article helps Ezeelogin gateway users on how to add custom server fields to the server add form.

Step 1. Login to Ezeelogin GUI, click on the **settings** -> **server field** -> **add custom server field**

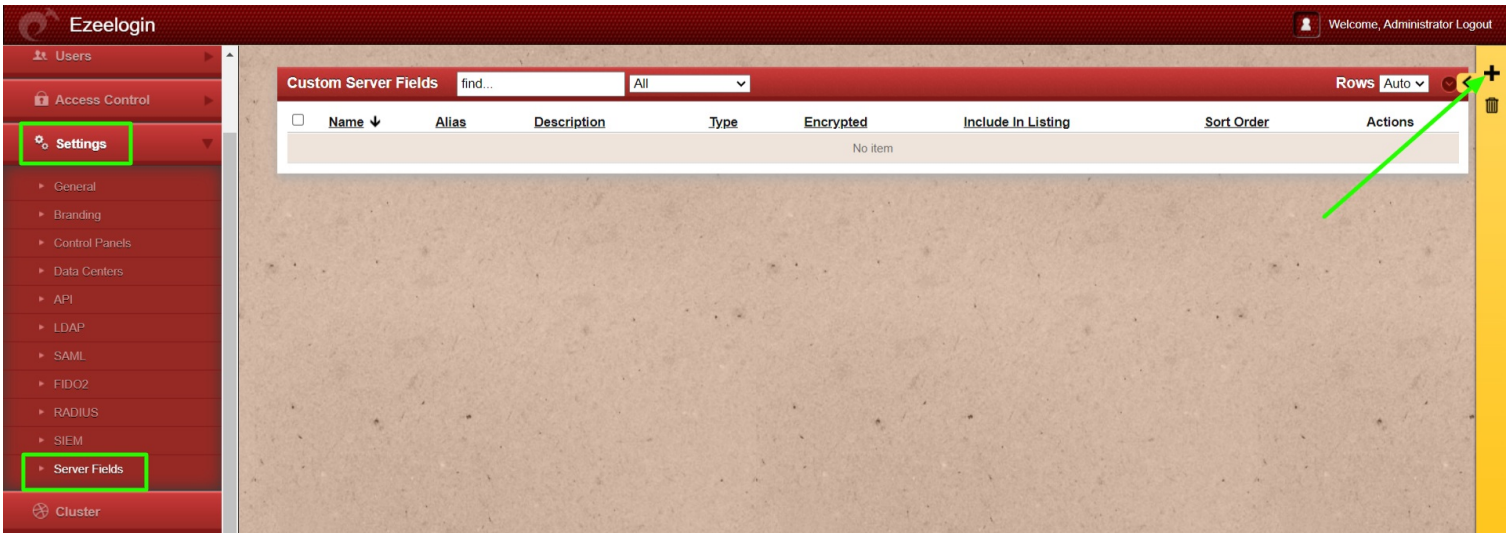


Step 2. Provide the details for the custom server field


Name: A name for the custom server field
Alias: The column title name shown in server listing.
Description: Brief description on the custom server field
Type: Type of the custom server field added.
Encrypted: Shows if the information stored in the field would be encrypted or not.
Include In Listing: If enabled, the filed will be displayed in the server listing.
Sort order: The order number determines the position of the field in the server edit page. Lower values would be
Actions: To add or delete custom fields.

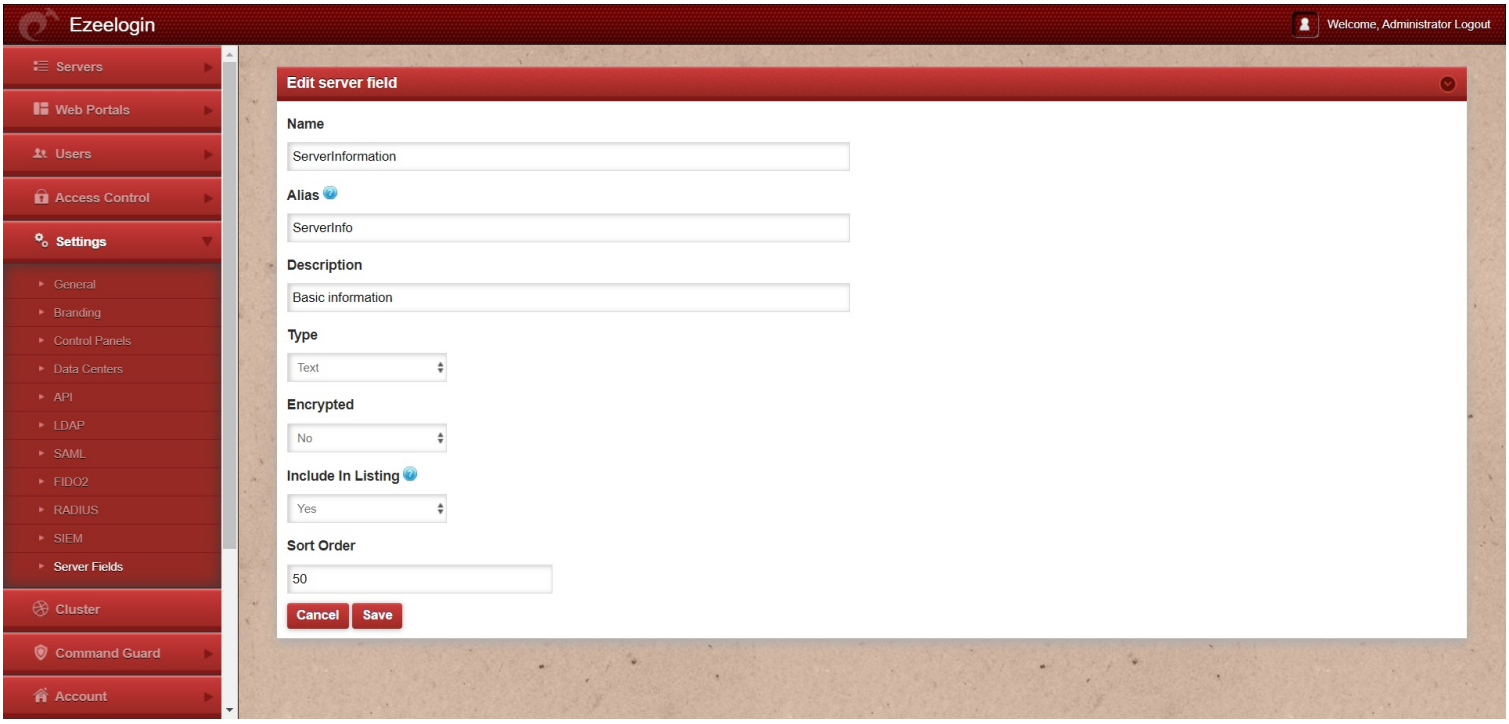


Step 3. The custom field can be viewed while adding a server by navigating to **Servers** -> **Add Server** -> **Advanced section**.

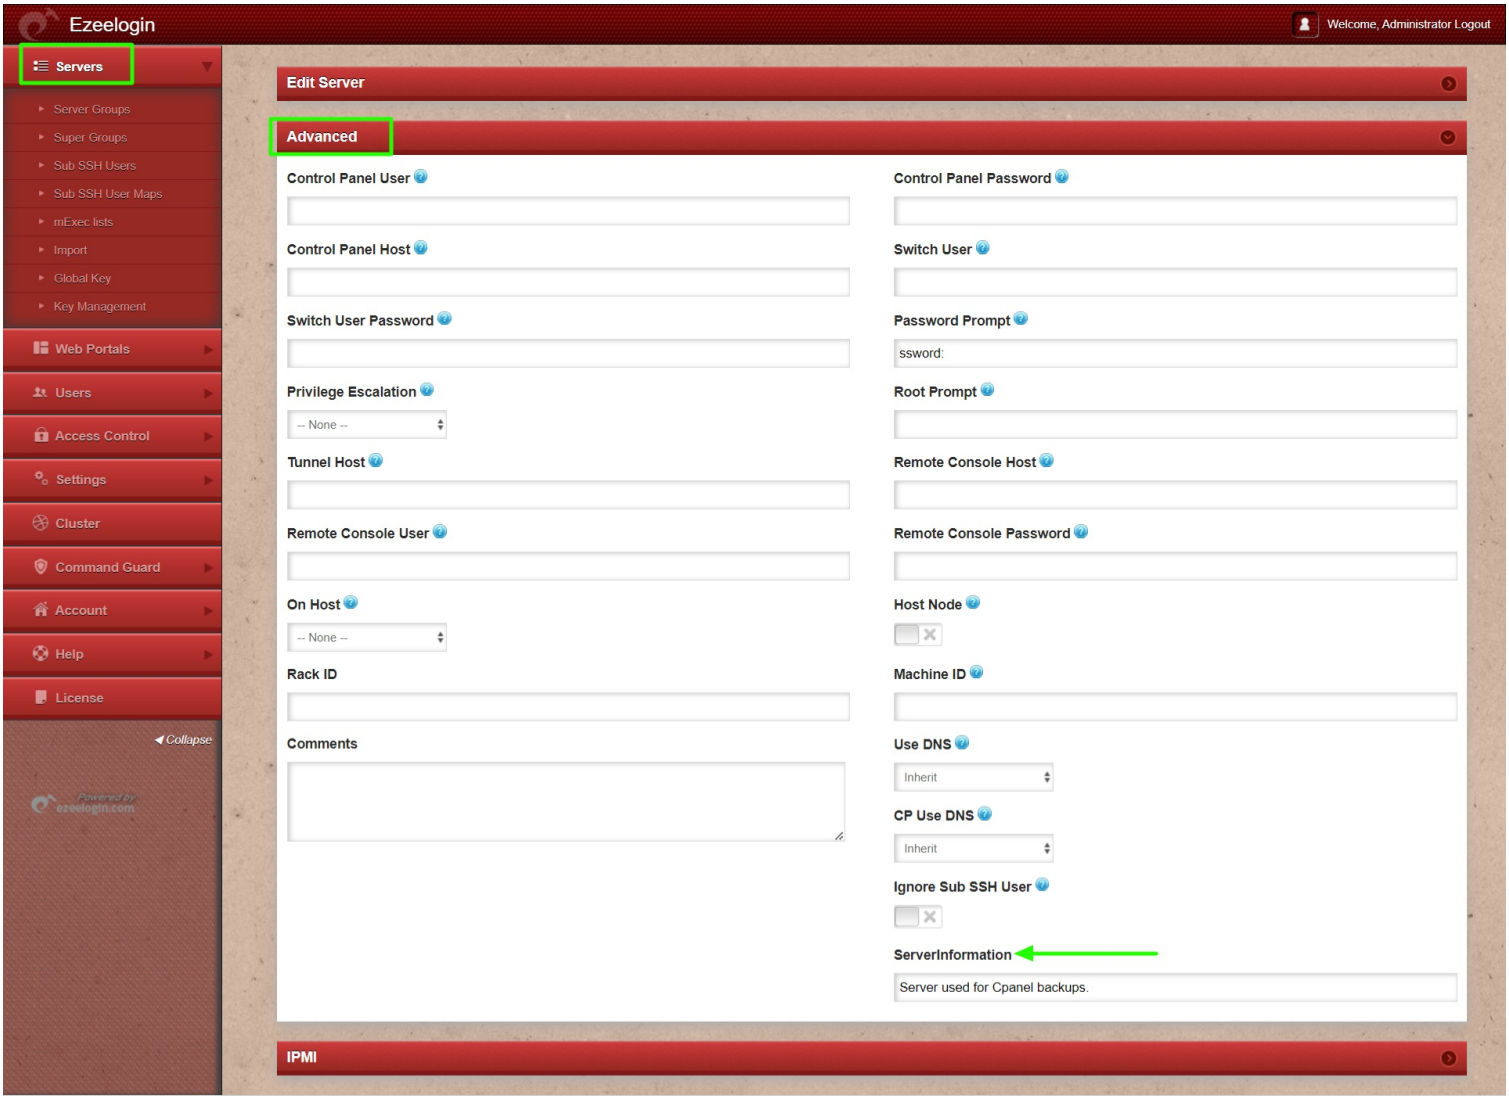


Step 4. When '**Include In Listing**' is enabled, the custom server field appears in the server listing and is displayed under the name specified in the '**Alias**' column.

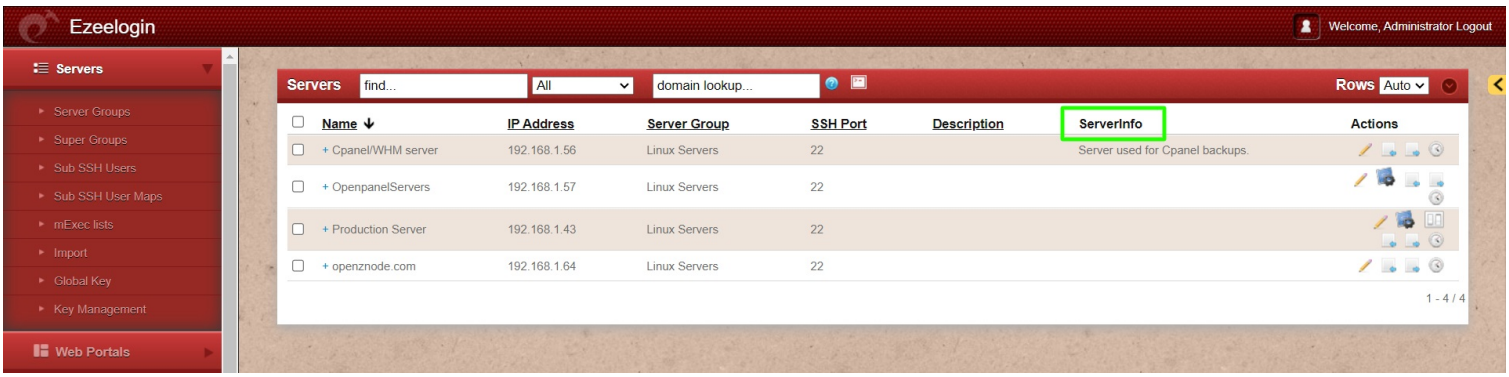


Step 5. To view custom server fields in Ezeelogin shell(ezsh) for gateway users, make sure to enable **Show Custom Fields** for the each individual gateway users in Ezeelogin GUI by clicking on the **Account** -> **Preferences** ->**Show custom fields in Ezeelogin Shell**

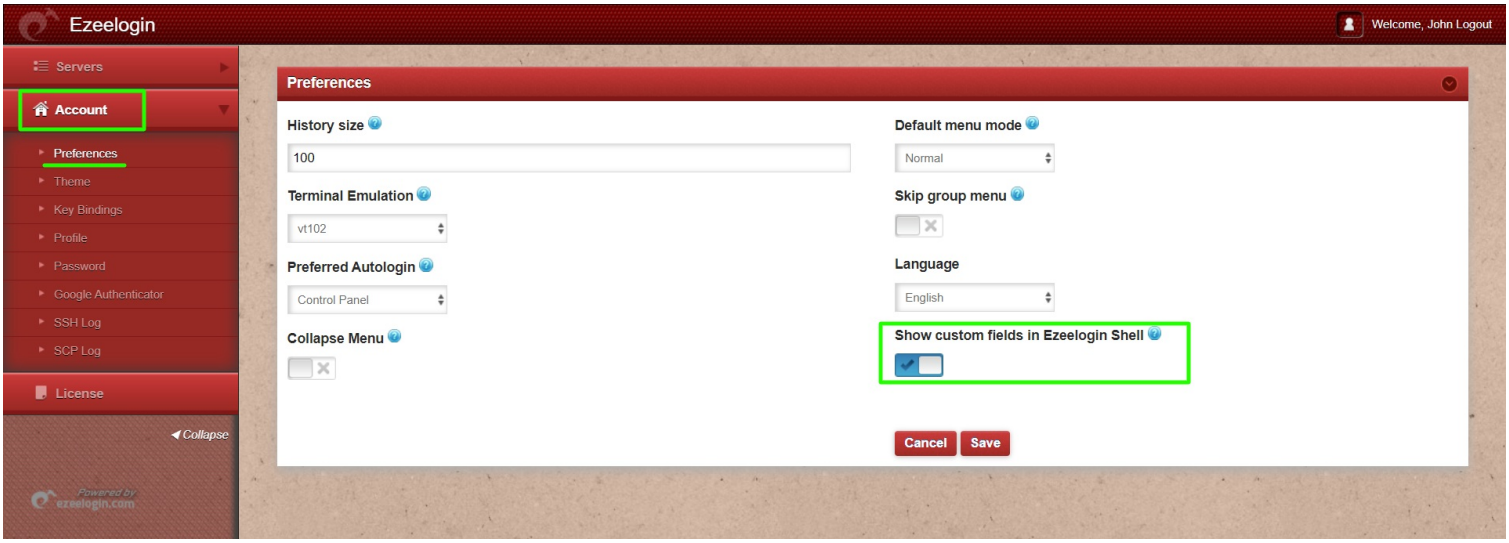

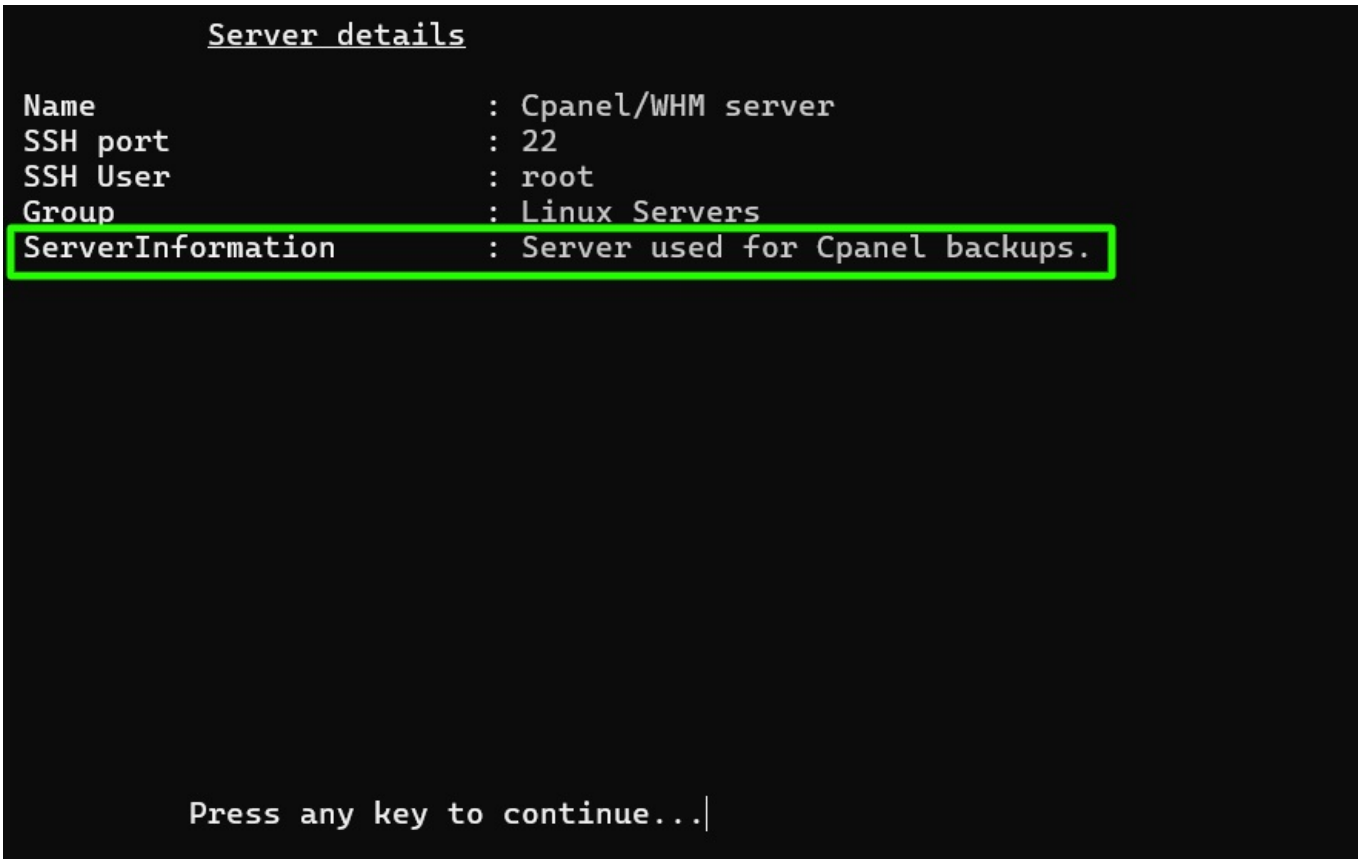

Step 6. Use the access control to grant the **custom server field access** and **view server details access** to non admin users. **Access control** -> **User-Action** -> **Servers** (**View Server Details**) and **Access control** -> **User-Action** -> **Settings**

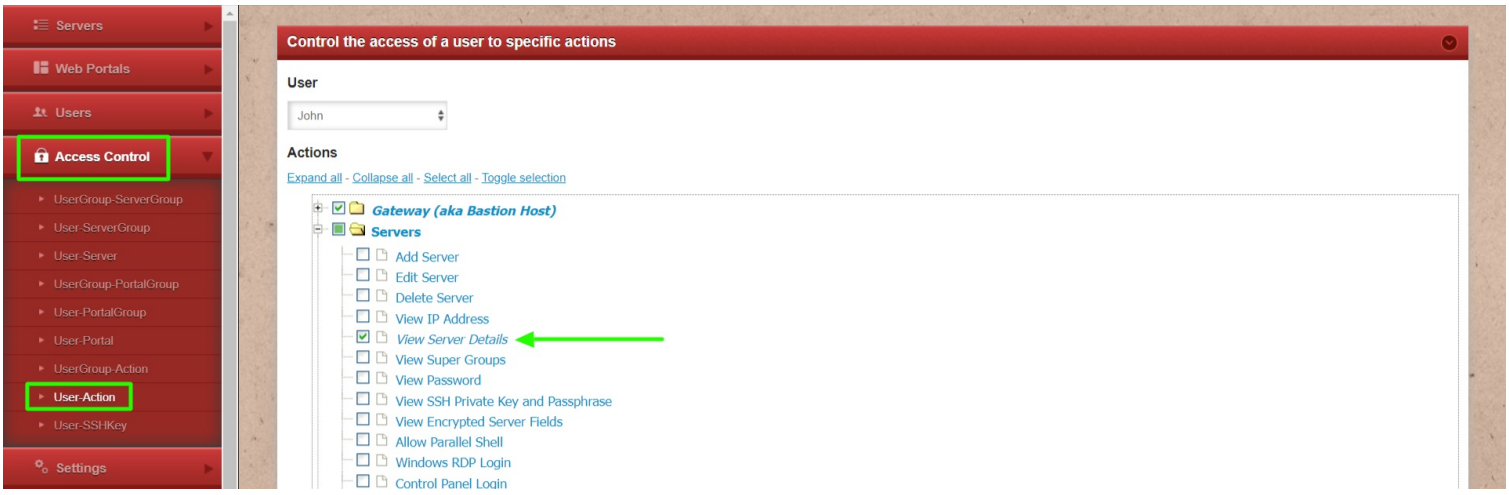

How to enable custom server field for all users in ezeelogin?

Emergency CLI Method:

Run the following command to enable custom server fields for all users.

```
root@gateway:~# php /usr/local/ezlogin/ez_queryrunner.php "REPLACE INTO prefix_preferences (user_id, name, value) SELECT id, 'show_custom_fields_ezsh' AS name, 'Y' AS value FROM prefix_users"
```

Related Articles:

Enable Custom Server fields for Ezeelogin Users from database

Migrate the custom server fields from Ezeelogin version 7.0 to the latest version

Online URL: https://www.ezeelogin.com/kb/article/add-custom-fields-on-server-add-form-261.html