Add custom fields on server add form

How to add custom fields on the server add form in Ezeelogin?

Overview: This article helps Ezeelogin gateway users on how to add custom server fields to the server add form.

 Step 1. Login to Ezeelogin GUI, click on the **settings** -> **server field** -> **add custom server field**
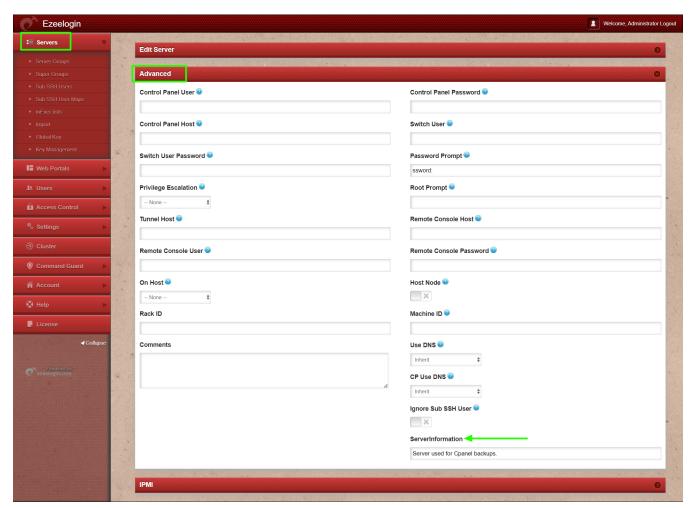

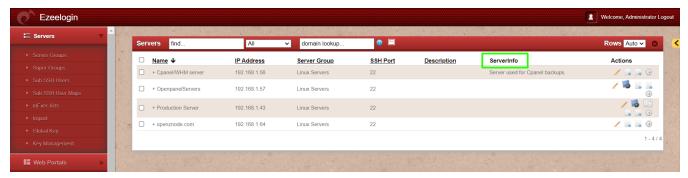**Step 2.** Provide the details for the custom server field

- **Name:** A name for the custom server field
- **Alias:** The column title name shown in server listing.
- **Description:** Brief description on the custom server field
- **Type:** Type of the custom server field added.
- **Encrypted:** Shows if the information stored in the field would be encrypted or not.
- **Include In Listing:** If enabled, the filed will be displayed in the server listing.
- **Sort order:** The order number determines the position of the field in the server edit page. Lower values would be
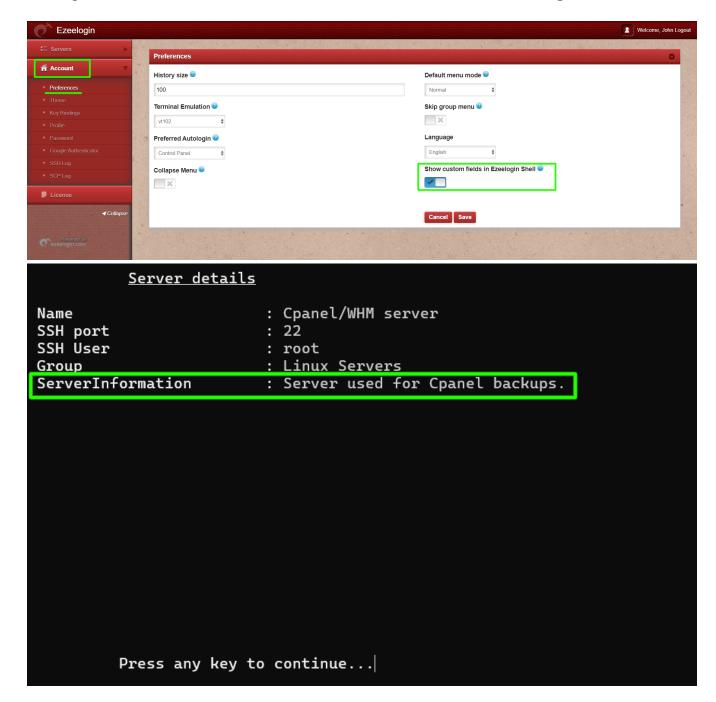- **Actions:** To add or delete custom fields.

Step 3. The custom field can be viewed while adding a server by navigating to **Servers** -> **Add Server** -> **Advanced section**.
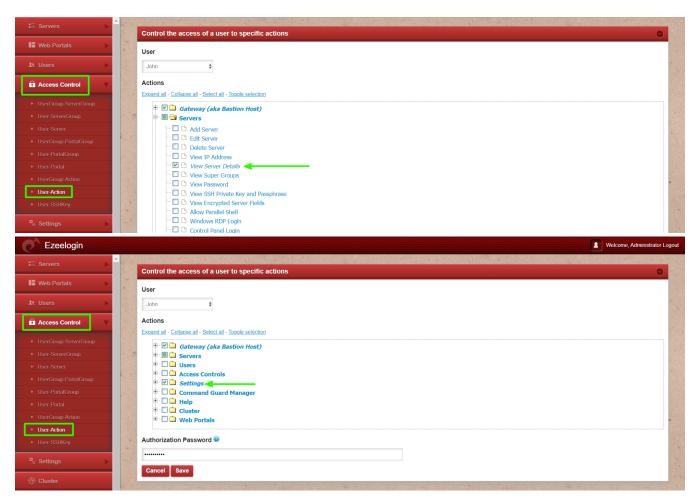

Step 4. When '**Include In Listing**' is enabled, the custom server field appears in the server listing and is displayed under the name specified in the '**Alias**' column.

Step 5. To view custom server fields in Ezeelogin shell(ezsh) for gateway users, make sure to enable **Show Custom Fields** for the each individual gateway users in Ezeelogin GUI by clicking on the **Account** -> **Preferences** ->**Show custom fields in Ezeelogin Shell**

Step 6. Use the access control to grant the **custom server field access** and **view server details access** to non admin users. **Access control** -> **User-Action** -> **Servers** (**View Server Details**) and **Access control** -> **User-Action** -> **Settings**

How to enable custom server field for all users in ezeelogin?

Emergency CLI Method:

- Run the following command to enable custom server fields for all users.

```
root@gateway:~# php /usr/local/ezlogin/ez_queryrunner.php "REPLACE INTO prefix_preferences
(user_id, name, value) SELECT id, 'show_custom_fields_ezsh' AS name, 'Y' AS value FROM
prefix_users"
```

Related Articles:

Enable Custom Server fields for Ezeelogin Users from database

[Migrate the custom server fields from Ezeelogin version 7.0 to the latest version](https://www.ezeelogin.com/kb/article/add-custom-fields-on-server-add-form-261.html)