

How to re-add a reinstalled server?

303 Vishnupriya August 28, 2024 [General](#) 3775


Steps to re-add a reinstalled server

Overview: This article outlines the steps to re-add a reinstalled server. First, select the reinstalled remote server and reset the SSH fingerprint. After resetting, update the new password in the Server -> Edit server section.


Step 1. Select the reinstalled remote server and Click



to reset the ssh fingerprint.

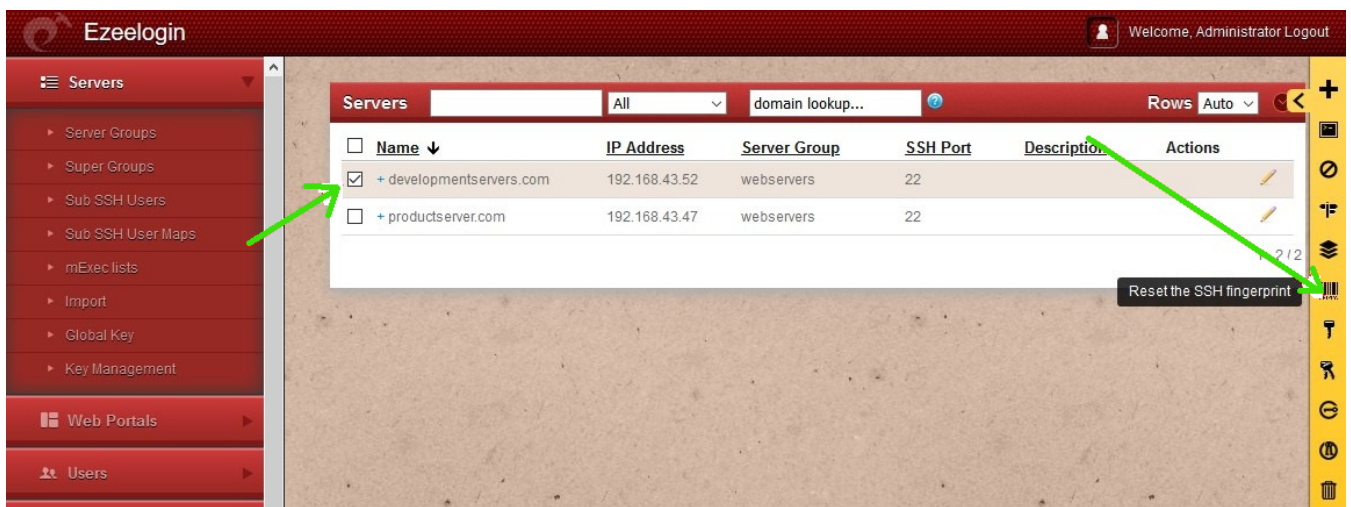

As shown below you can see the confirmation

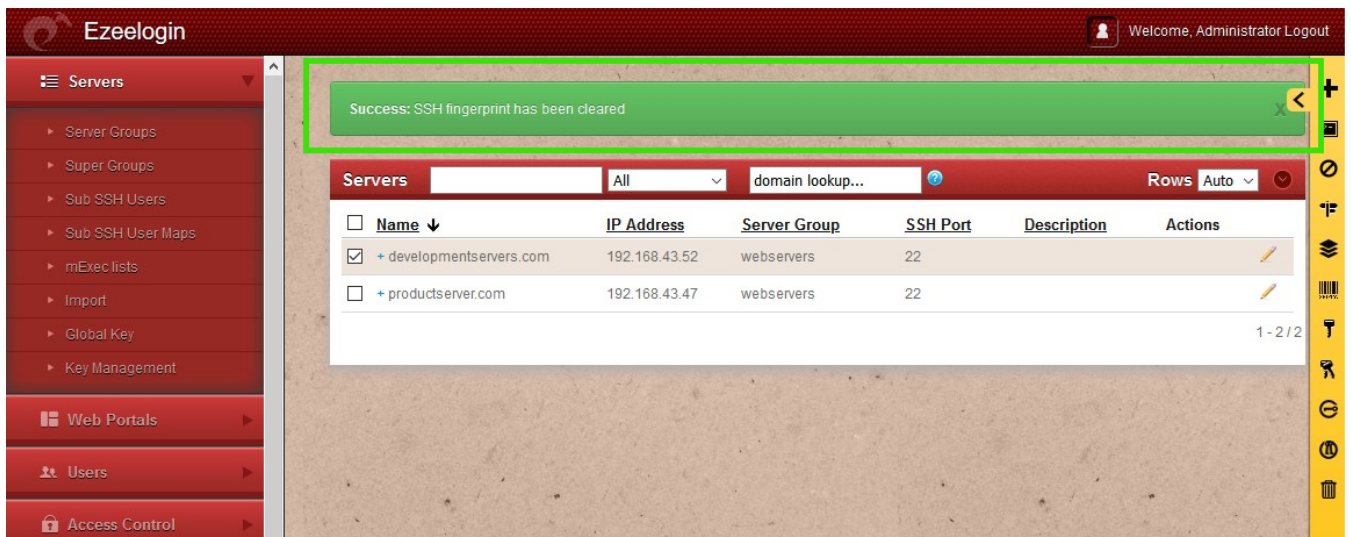

Step 2. After resetting the SSH fingerprint, you need to update the new password in **Server** -> **Edit server**

Ezeelogin Welcome, Administrator Logout

Servers

- Server Groups
- Super Groups
- Sub SSH Users
- Sub SSH User Maps
- mExec lists
- Import
- Global Key
- Key Management

Edit Server

Hostname: developmentservers.com

IP Address(es): 192.168.43.52

SSH Private Key

SSH Password / RDP Password

SSH Key Passphrase

Password Management: keep server password

SSH Port: 22

Control Panel: -- None --

Description

RDP

Server Group: webservers

SSH: enabled

Remote SSH login user / RDP login user: root

Datacenter: -- None --

Windows Domain

Cancel Save

Related Articles

[Add a Linux server or a Linux instance into the Ezeelogin ssh jumphost?](#)

[Add new server without changing the remote user password](#)

[Add / update / delete servers through ezeelogin API](#)

Online URL: <https://www.ezeelogin.com/kb/article/how-to-re-add-a-reinstalled-server-303.html>