Functions in webactivity logs

431 Vishnupriya August 8, 2024 Common Errors & Troubleshooting, General 6567

Overview of web activity log functions in ezeelogin

Overview: This article details the different functions of the web activity log for the user tab in Ezeelogin, including actions such as adding, editing, and deleting users, managing user groups, and handling various logs like SSH, RDP, and SCP. It also covers account preferences, command management, access control, server configurations, general settings, web portals, and authentication processes.


The different functions of the **webactivity log** for the user tab are shown below:

1. Users


Users ->Index (function) : When you click on the user tab, it will show the below log.



Users ->add : When a new user is added to Ezeelogin.

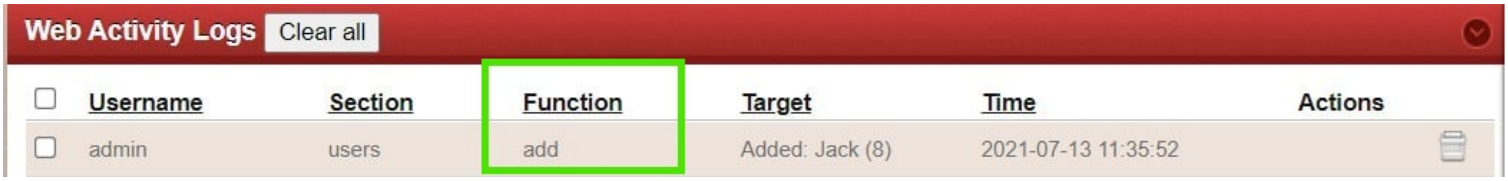

Users -> Edit : Edit user or any changes made by editing the user.

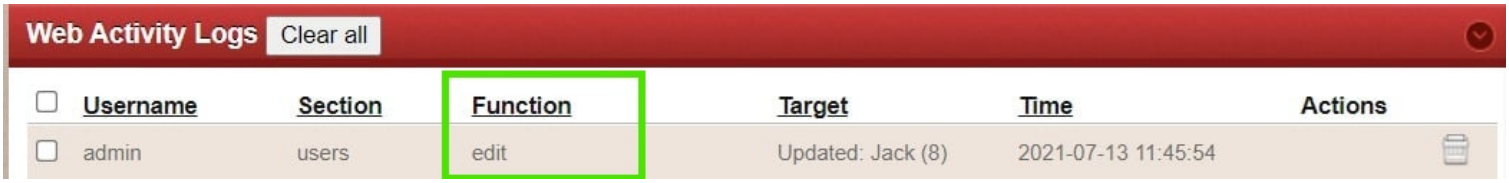

Users ->Delete : Deleting a user from Ezeelogin




Users -> reset_acl : Reset access control(8 refers to the user_id of the user)



Users -> generate_password and Users > reset_password : Generate and reset the password of the user.



Users -> usergroups : Usergroup Tab

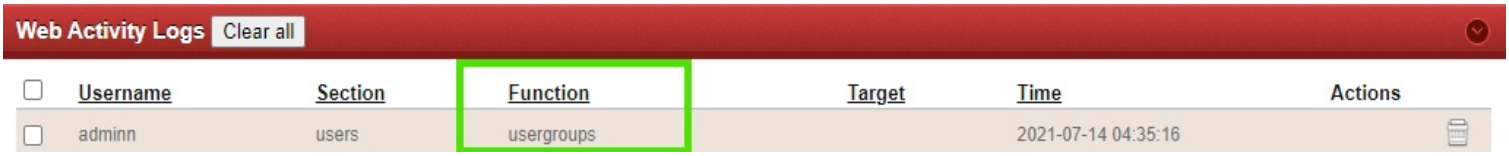

Users -> usergroup_add : Add user group




Users -> usergroup_update : Update Usergroup




Users -> usergroup_delete : Delete Usergroup



Users -> sshlog : List SSH Logs

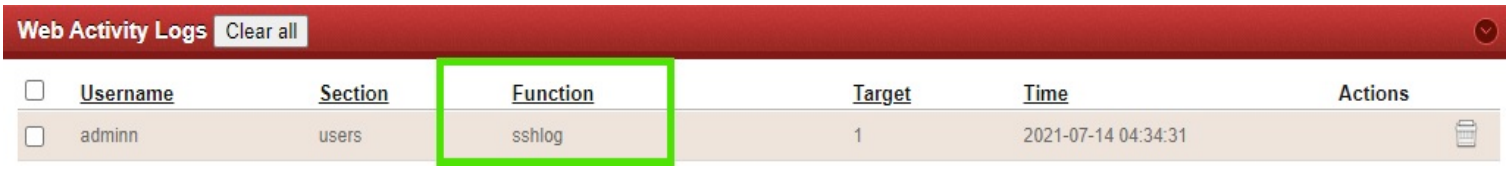


Users -> view_sshlog : View SSH Logs

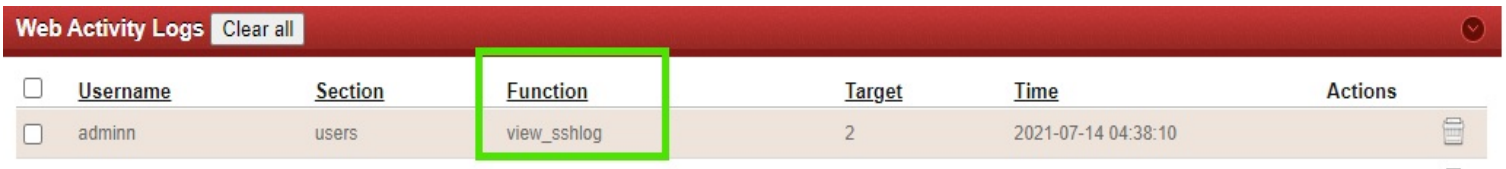

Users -> comment_sshlog : Add comment to SSH Logs



Users -> delete_sshlog : Delete SSH Logs

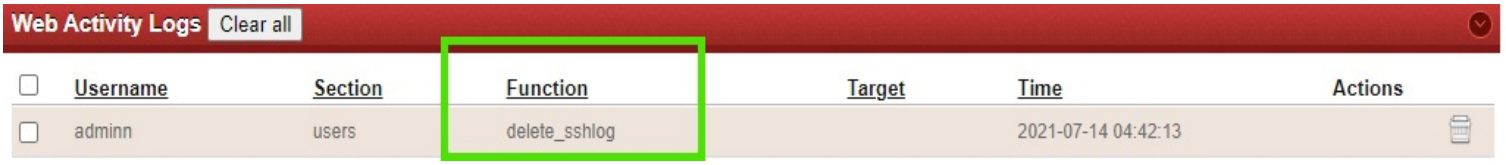

Users -> sshloginfo : SSH Log information



Users -> stream_sshlog : Enable SSH Live streaming



Users -> rdplog : List RDP Logs



Users -> view_rdplog : View RDP Logs



Users -> comment_rdplog : Add comments to RDP Logs



Users -> delete_rdplog : Delete RDP Logs



Users -> rdploginfo : RDP Log Information



Users -> scplog : List SCP Logs



Users -> clear_scplogs : Clear SCP Logs



Users -> delete_scplog : Delete SCP Logs



Users -> webactivity : List Webactivity



Users -> delete_webactivity_log : Delete Webactivity Logs



Users -> gateway activity : List Shell Activity



Users -> delete_gwactivity_logs : Delete Shell Activity



Users -> clear_gwactivity_logs : Clear Shell Activity



Users -> serveractivity : List Server Activity Logs



Users -> delete_serveractivity_log : Delete Server Activity Logs



Users -> clear_serveractivity_logs : Clear Server Activity Logs



Users -> worksummary : List work summary of users via Ezeelogin Shell



Users > userstatus : List the status of Users in Ezeelogin Shell



Users > ldap : List the LDAP Users



Users > import : Import LDAP User



2. Accounts


Account > index : Account Preference



Account > theme : Theme change



Account -> key_bindings : Ezeelogin shell keybindings list

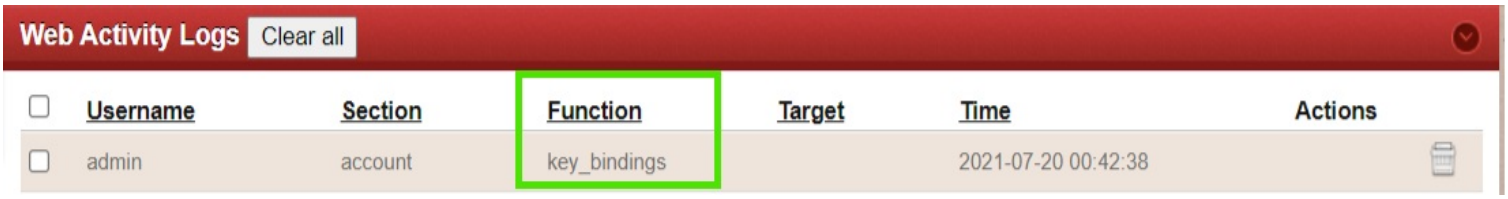

Account -> restore_default_keys : Restore default shell key bindings



Account > password : When accessing password tab



Account > profile : Editing or accessing Account profile



Account > googleauth : when enabling or listing Google Authenticator



Account > duoauth : When enabling or clicking Duo Authenticator




Account > sshlog : Listing SSH log



Account > view_sshlog : Displays when viewing SSH log content



Account > sshloginfo : Displays on clicking the" + "button on the SSH log.

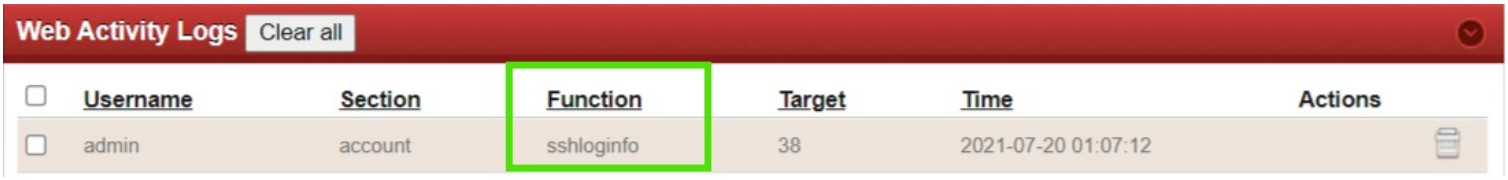

Account > scplog : Listing the SCP log



Account > rdplog : Listing RDP Log



Account > view_rdplog : Displays when viewing RDP log content from Account tab



Account > rdploginfo : Displays on clicking the " + " button to elaborate the RDP Info.



3. Command Guard

Commands > index : Commands list




Commands > add : Command add



Commands > update : Command update




Commands > command_verify : Verify commands

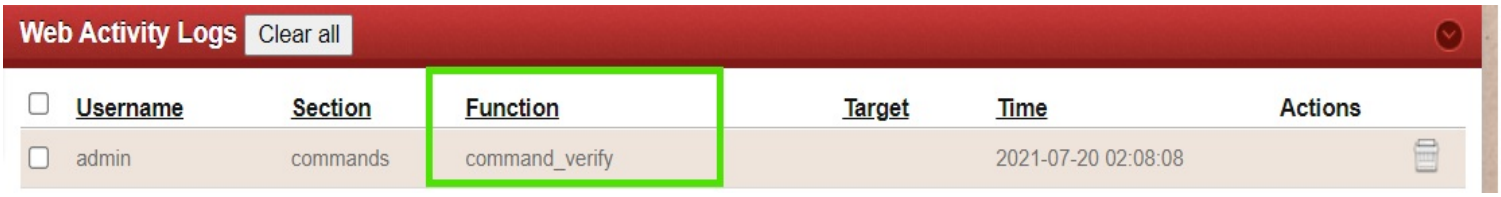

Commands -> delete : Command delete



Commands > commandgroup_add : Command group add

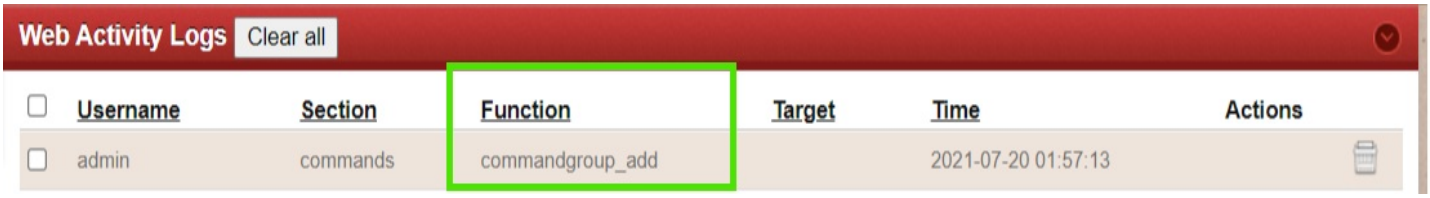


Commands > commandgroup_update : Command group update



Commands > commandgroup_delete : Command group delete



Commands > commandgroup_commands : Command group list

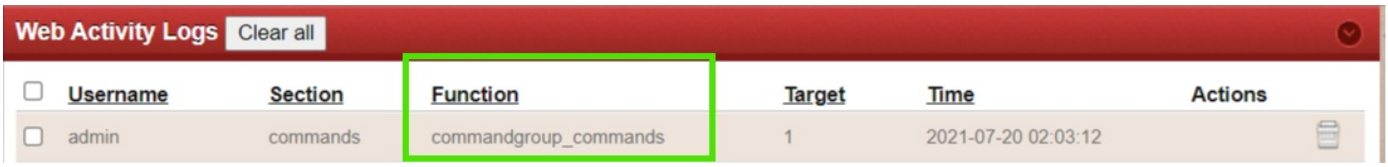

4. Access Control

Acls -> index : Access control list



Acls -> user_server : when you Grant User-server privilege



Acls -> usergroup_servergroup : when you Grant Usergroup-server group privilege



Acls -> user_servergroup : when you Grant User-server group privilege



Acls -> usergroup_portalgroup : when you Grant User group -portal group privilege



Acls -> user_portalgroup : when you Grant User - portal group privilege



Acls -> user_portal : when you Grant User- portal privilege



Acls -> usergroup_feature : when you Grant Usergroup- Action Privilge



Acls -> user_feature : when you Grant User-action privilege



Acls -> cancel_acl : Cancel Access control



Acls -> user_sshkey : when you Grant User- ssh keys privilege




5. Server


Servers -> index : When you click on the Server list




Servers -> add : when you Add server

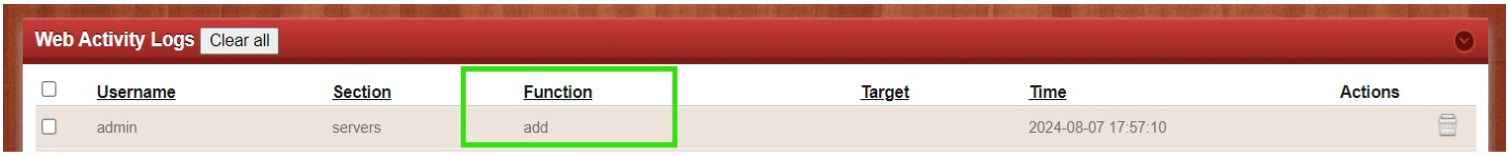


Servers -> edit : when you edit server

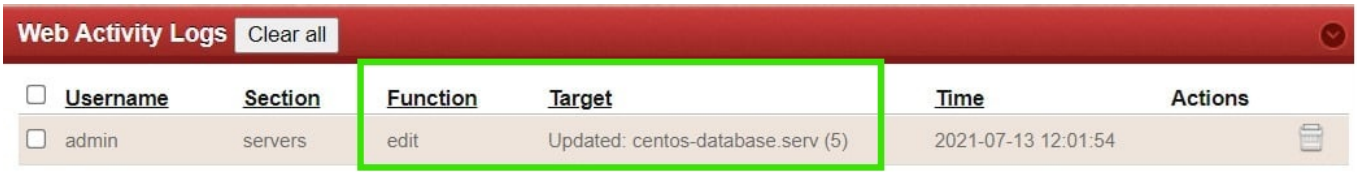


Servers -> delete : Delete server

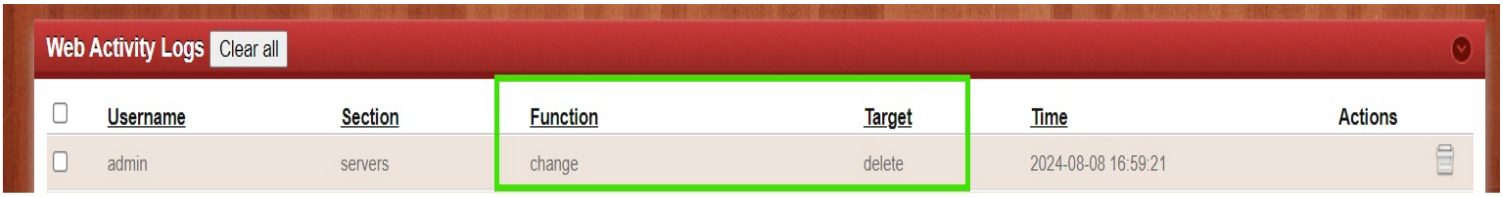


Servers -> change : Change server group

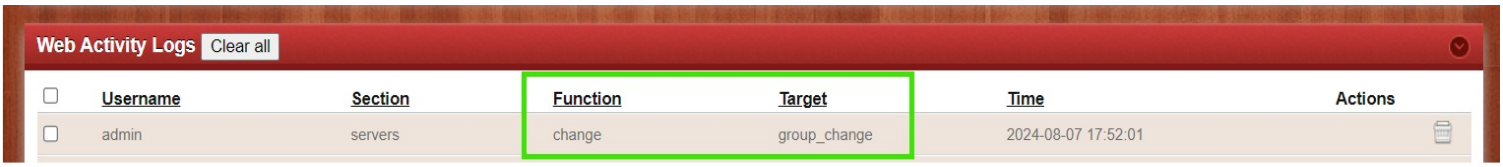

Servers -> change : when you Enable / Disable ssh connectivity

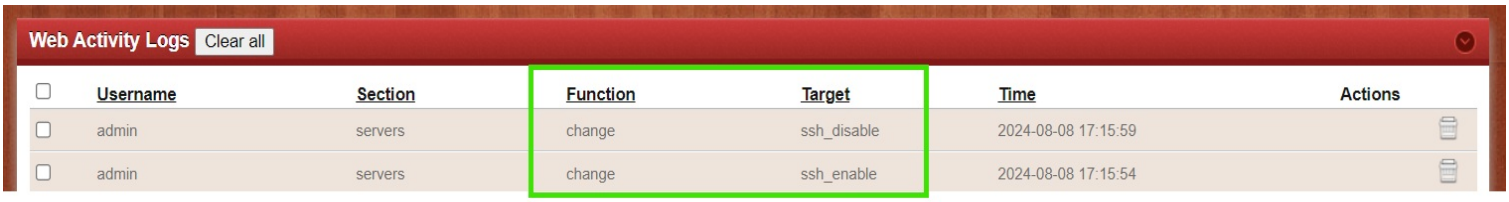


Servers -> change : Change ssh port

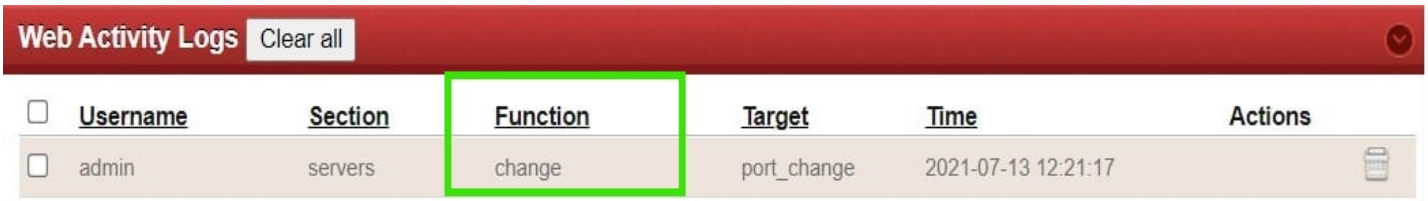

Servers -> change : Change ssh fingerprint



Servers -> mass_reset and Servers -> reset : Reset password on the server

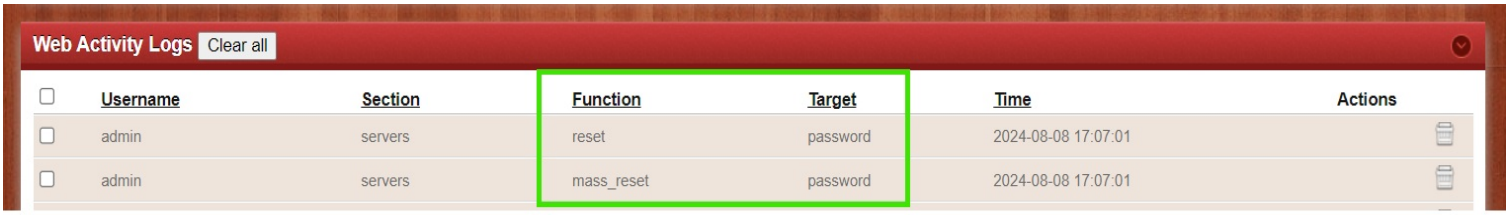

Servers -> mass_reset and Servers -> reset : Setup ssh key on the server



Servers -> servergroups : View server group



Servers -> servergroup_add : Add server group



Servers -> groupmembers : View server group members



Servers -> servergroup_update : Edit server group



Servers -> servergroup_delete : when you delete server group




Servers -> supergroups : View server super group



Servers -> supergroup_add : Add server super group




Servers -> supergroup_update : Edit server super group

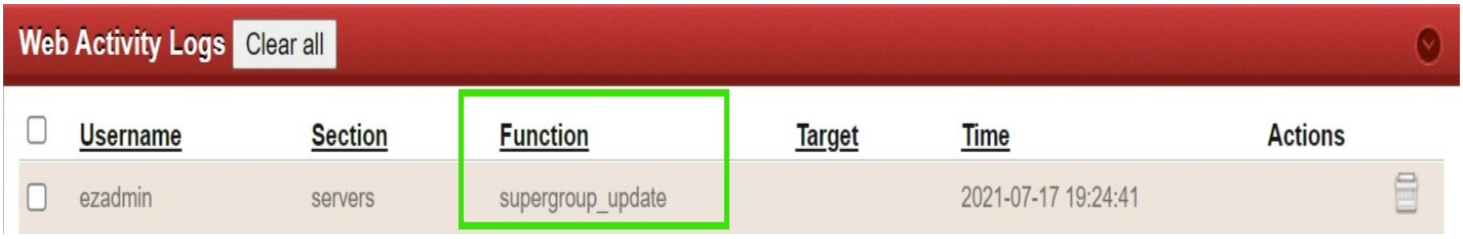

Servers -> supergroup_delete : Delete server super group



Servers -> supergroup_members : Edit super group members

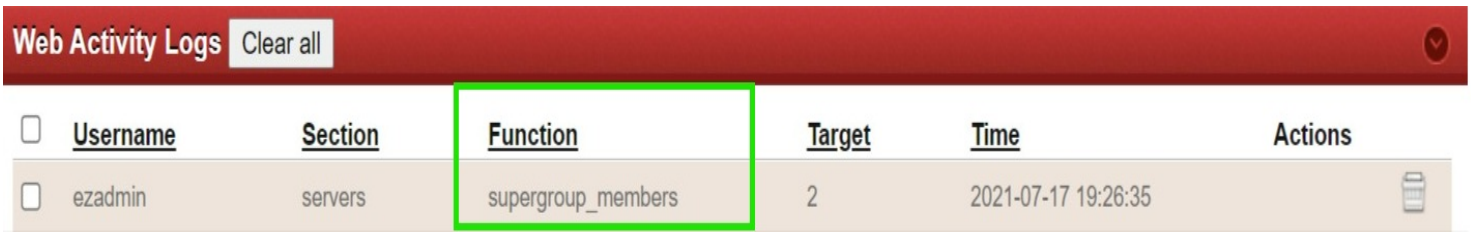

Servers -> mexeclists : View mexec list



Servers -> mexeclist_add : Add mexec list




Servers -> mexeclist_update : Edit mexec list



Servers -> mexeclist_delete : Delete mexec list



Servers -> mexeclist_members : Edit mexec list members

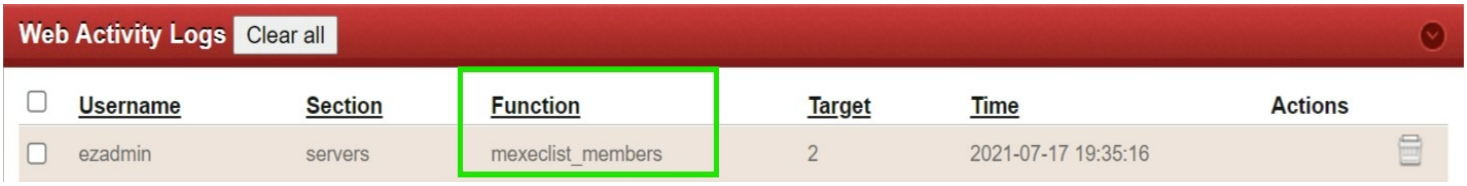


Servers -> import : View server import




Servers -> sshusers : View subssh user



Servers -> sshusers_add : Add subssh user

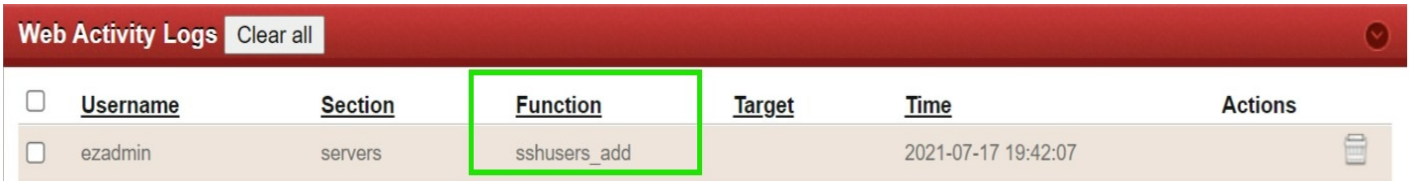

Servers -> sshusers_edit : Edit subssh user

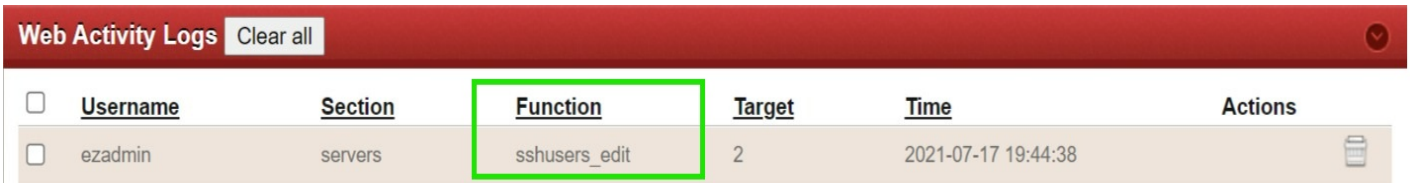

Servers -> sshusers_delete : Delete subssh user



Servers -> setup_sshusers : Setup subssh user on all server



Servers -> ssh_private_key : View key management




Servers -> add_ssh_private_key : Add private key in key management



Servers -> edit_ssh_private_key : Edit private key in key management



Servers -> delete_ssh_private_key : Delete private key in key management

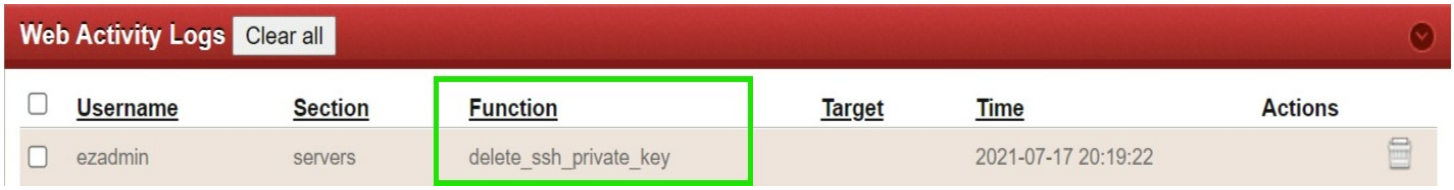


Servers -> ssh_key : View global key




Servers -> sshuser_assign_list : Sub ssh user list



Servers -> sshuser_assign_add : Add subssh user map

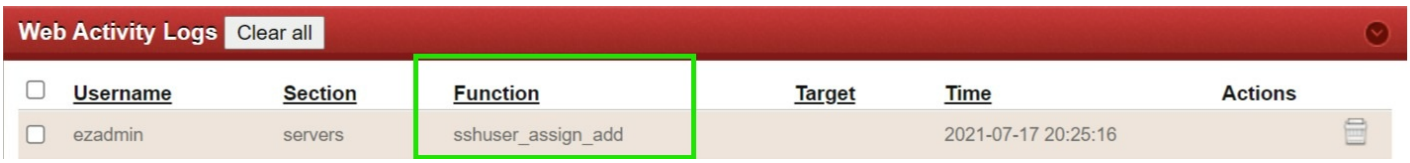

Servers -> sshuser_assign_edit : Edit subssh user map

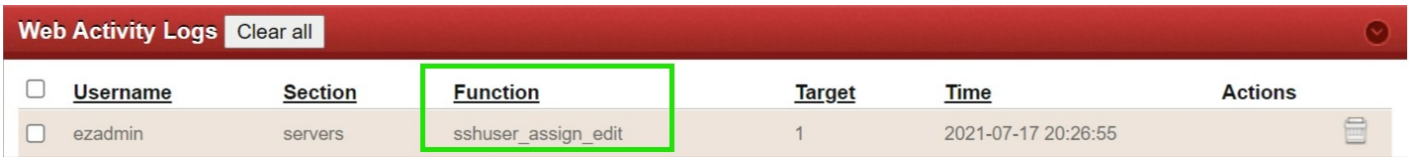

Servers -> sshuser_assign_delete : Delete subssh user map



Servers -> ssh_public_key_view : View public key in key management



6. Settings

Settings -> index : Settings index page



Settings -> addsettings : Change any settings in the general tab.



Settings -> branding : Branding tab



Settings -> logo : Logo settings in branding tab.



Settings -> reset_logo : Reset logo in logo settings in branding tab.



Settings -> background : Background settings in branding tab.



Settings -> delete_background : Delete background image in branding tab



Settings -> api : API list page in the settings tab.



Settings -> ldap : LDAP list page in the settings tab.



Settings -> ldap_add : Add LDAP / AD



Settings -> ldap_edit : Edit LDAP / AD



Settings -> ldap_delete : Delete LDAP / AD



Settings -> saml : SAML settings page



Settings -> saml_idp_metadata_fetch : SAMLmetadata fetched




Settings -> radius : RADIUS settings page



Settings -> cpanels : Control panel list page



Settings -> addcp : Add control panel

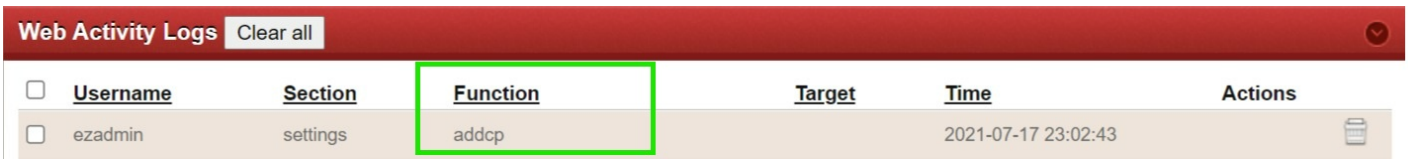

Settings -> editcp : Edit control panel



Settings -> deletecp : Delete control panel



Settings -> datacenters : Data center list page



Settings -> adddc : Add data center



Settings -> editdc : Edit data center



Settings -> deletedc : Delete data center



Settings -> server_fields : Server field list page.



Settings -> add_server_field : Add server filed



Settings -> delete_server_field : Delete server filed



Settings -> edit_server_field : Edit server filed



Settings -> clear_radius : Clear radius settings



Settings -> clear_radius_2fa : Clear radius 2fa settings



7. Web Portals


Portals -> index : Web portal list page




Portals -> add : Add web portal



Portals -> view : View web portal

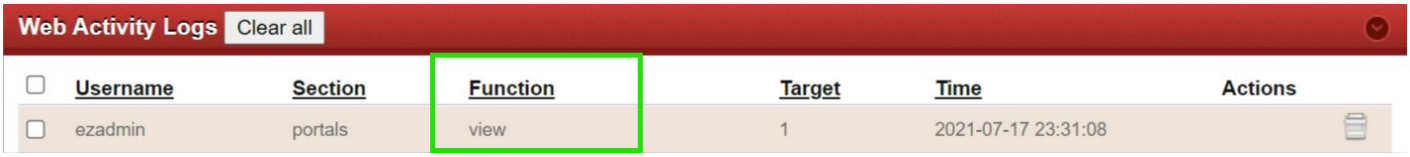

Portals -> edit : Edit web portal

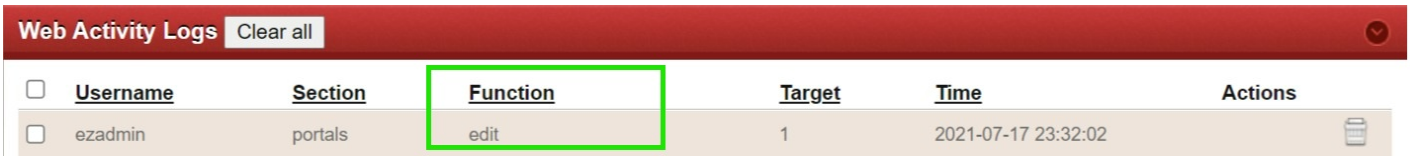

Portals -> delete : Delete web portal



Portals -> login and Portals -> autologin : Login and Autologin in the web portal



Portals -> groups : Web portal group list




Portals -> group_members : Web portal group members list




Portals -> add_group : Add web portal group

Portals -> edit_group : Edit web portal group

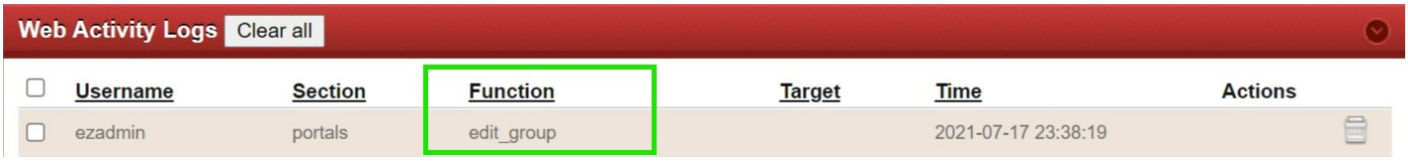

Portals -> delete_group : Delete web portal group

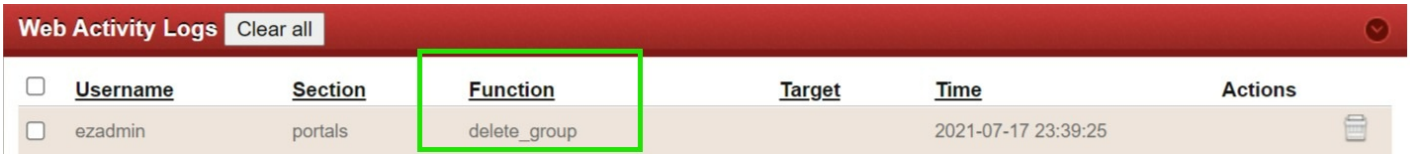

Portals -> export : Export tab in the web portal



Portals -> download_portals : Download web portal



Portals -> import : Import tab in the web portals



7. Authentication

Auth -> login and Auth -> logout : Login and logout from Ezeelogin GUI



Related Articles

Web Activity Log

How does " Web Activity" in Ezeelogin works?

Audit logs and configurations

How to get the Shell Activity of Users

Different logs of user

Online URL: https://www.ezeelogin.com/kb/article/functions-in-webactivity-logs-431.html