Set SSH Key Expiry for the gateway users


625 Rakhi September 13, 2023 Features & Functionalities 810

How to set SSH Key Expiry for the gateway users and force to rotate the public keys?

Configure SSH keys to expire after a specific number of days from GUI. This setting allows you to set an expiration period for SSH keys, and once that period is reached, the keys will become invalid for authentication and the user will later have to login via Password. A value of 0 means that SSH keys will never expire.

1. Under Settings > General > Authentication > Set User SSH key lifetime.

As an example, Below Screenshot says that the SSH user will expire in 1 day. A value 0 means SSH key will never expire.

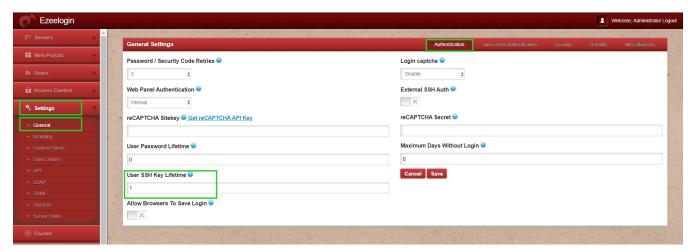

Refer: How to add ssh public key for passwordless authentication in ssh

2. After a designated period has passed and the key for the specified user has expired, attempting to log in from the backend using key authentication will be unsuccessful. However, the user will still be able to access the system using password authentication. This ensures that security measures are maintained while granting access through an alternative authentication method when key-based authentication is no longer valid.

Password:

Following is the expired SSH key, the expiration of which is determined by the date configured in the GUI. Upon adding a key, users can access the associated expiration date by pressing the F2 key.

Authorized SSH public key Current key: expiry-time="20230810" ssh-rsa AAAAB3NzaClyc2EAAAADAQABA AABQCSpsiP4ZCHoJTtuSLyyQktSRJSlmeCw0YX5Nj39As10c2/7/lq PPCAUDIN-JUCLpW373bsZZADADInCpGQDNDNQZxwEDJHJ09f1E/wswW DnE908afGzTxXMzcL4GCWwmaCHJ9EaEh/16MsUJDLD7imCnx/DDWLmmn RZcnBGGSXSZAbGLENKyTidnwylLDP7gadtHzDXJWbcLSBLJZMSmH52F c+MqCgsojSdw98BpOjaHGaXUeBj9SAtDN9QDoxcq0g9cvgsyAEwJJTF8 6WwRBdbytJ3xLbnby98Bhd7ZTzHxpj3EdGKSMsHHHDzSLZYBnd10 PaUuzzgYRZagGL+WP8aiNy7dSJyAUvp1Sbuzp9mqN6ykJ3d0vcKVDsdc 2mu00BUM7ScyG8By/EBU5xxQKCuzByAZUt9aHkrTPGZ/mv5Dz VfwydN38SfeeGc= root@gateway Input new key and press 'Enter': NDTE: SSH key is local to the node. If cluster is config ured, add the key on the other node as well. Press Esc key to cancel... SERVERS [All servers] (group) [Normal /] Start typing string to locate. ESC: Clear search, F1/+: Help, F4/1: Exit.

Online URL: https://www.ezeelogin.com/kb/article/set-ssh-key-expiry-for-the-gateway-users-625.html