


Switching authentication methods in SSHD

636 Nesvin KN April 15, 2025 [General](#) 1659

How to enable or disable authentication methods in the SSH Daemon on a Linux server?

Overview: This article describes how to enable or disable password and public key authentication methods in the SSH Daemon on a Linux server, including steps to safely back up and modify the SSH configuration using commands.

Password authentication and key-based authentication are two common methods used to access Linux systems securely. **Key-based authentication is generally considered more secure than password authentication** because it relies on strong cryptography, eliminates the risk of weak passwords, and provides an additional layer of protection through passphrase encryption.

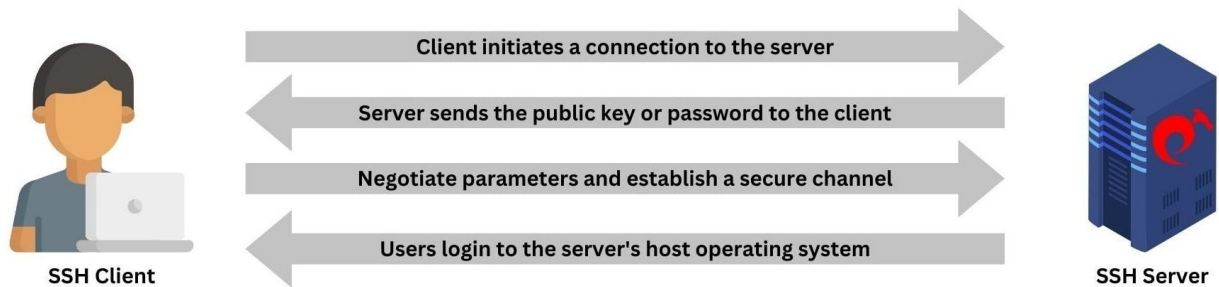

Important commands to take backup and check configuration files before restarting the service:

1. **Install perl** on the server.

```
username@server ~]$ apt install perl -y #Ubuntu
```

```
username@server ~]$ yum install perl -y #CentOS
```

2. Take a **backup of the configuration file** before making any changes.

```
username@server ~]$ cp -p /etc/ssh/sshd_config  
/etc/ssh/sshd_config_backup
```

3. Use the **diff command** to compare the backup file and the original file to view the changes.

```
username@server ~]$ diff /etc/ssh/sshd_config  
/etc/ssh/sshd_config_backup
```

```
< PasswordAuthentication yes
```

```
---
```

```
> PasswordAuthentication no
```

4. Run the **sshd -t** command to verify that sshd is configured correctly.

```
username@server ~]# sshd -t
```

Enable or disable password or public key authentication in SSH Daemon?

1. How to **enable public key authentication** in SSH Daemon?

```
username@server ~]# perl -p -i -e  
"s/[s#]*[pP]ubkey[aA]uthentications+(yes|no)/PubkeyAuthentication  
yes/" /etc/ssh/sshd_config
```

```
username@server ~]# cat /etc/ssh/sshd_config | grep -i  
"PubkeyAuthentication"
```

```
PubkeyAuthentication yes
```

```
username@server ~]# systemctl restart sshd
```

2. How to **disable public key authentication** in SSH Daemon?

```
username@server ~]# perl -p -i -e  
"s/[s#]*[pP]ubkey[aA]uthentications+(yes|no)/PubkeyAuthentication  
no/" /etc/ssh/sshd_config
```

```
username@server ~]# cat /etc/ssh/sshd_config | grep -i  
"PubkeyAuthentication"
```

```
PubkeyAuthentication no
```

```
username@server ~]# systemctl restart sshd
```

3. How to **enable password authentication** in SSH Daemon?

```
username@server ~]# perl -p -i -e  
"s/[s#]*[pP]assword[aA]uthentications+(yes|no)/PasswordAuthentication  
yes/" /etc/ssh/sshd_config  
  
username@server ~]# cat /etc/ssh/sshd_config | grep -i  
"PasswordAuthentication"  
  
PasswordAuthentication yes  
  
username@server ~]# systemctl restart sshd
```

4. How to **disable password authentication** in SSH Daemon?

```
username@server ~]# perl -p -i -e  
"s/[s#]*[pP]assword[aA]uthentications+(yes|no)/PasswordAuthentication  
no/" /etc/ssh/sshd_config  
  
username@server ~]# cat /etc/ssh/sshd_config | grep -i  
"PasswordAuthentication"  
  
PasswordAuthentication no  
  
username@server ~]# systemctl restart sshd
```

Run the above commands in the parallel shell of Ezeelogin to change the authentication methods across different server groups or all servers added to Ezeelogin.

Refer to the detailed article on [parallel shell](#).

Related Articles:

[Run sshd on different ports.](#)

[Configurations to be enabled in sshd config.](#)

Online URL: <https://www.ezeelogin.com/kb/article/switching-authentication-methods-in-sshd-636.html>