


Could not connect to other node database

How to solve error 'Could not connect to other node database' ?


Overview: This article provides troubleshooting steps to fix the **“Could not connect to other node database”** error that appears in the Ezeelogin UI on clicking **“Verify Database”** on the primary node. This error can happen in two cases, when the other node shows **“Not Available”** or **“Down.”**

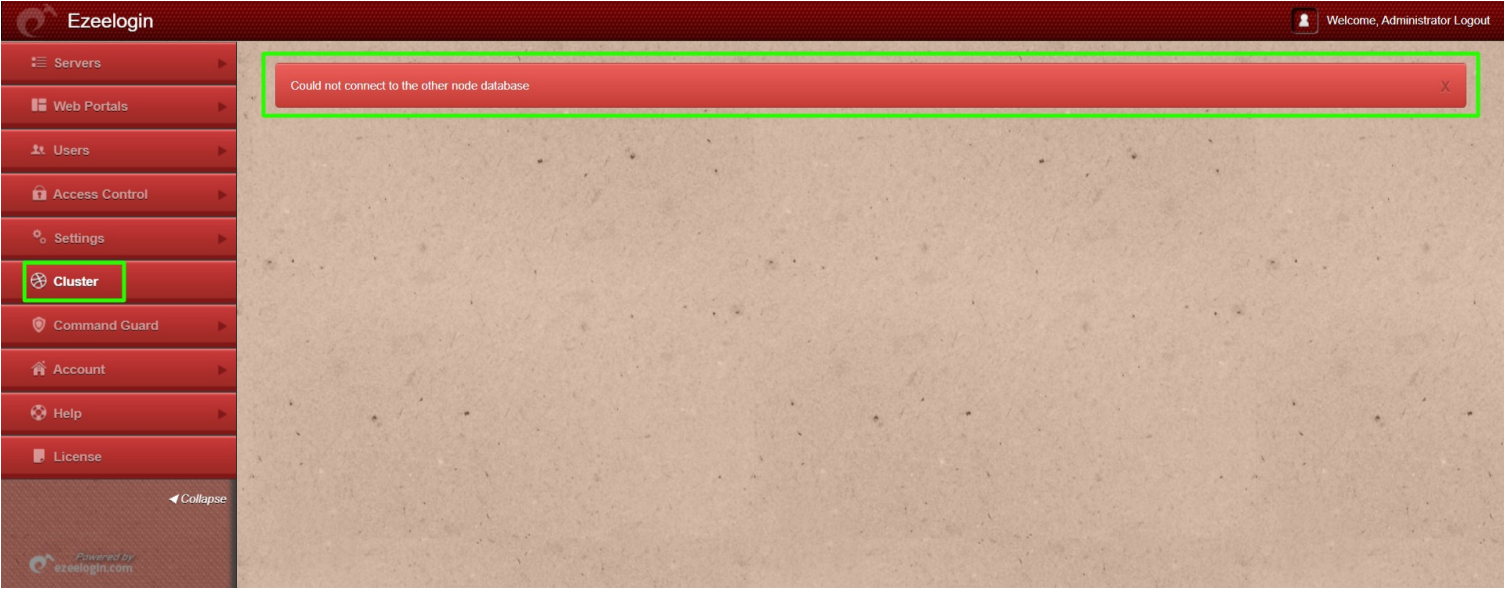

The above error occur on clicking **“Verify Database”** under the Cluster tab in the following two cases:

Case 1: When the other node state shows "Not Available"

This error occurs when there is **no connection** from the primary server to the secondary server.

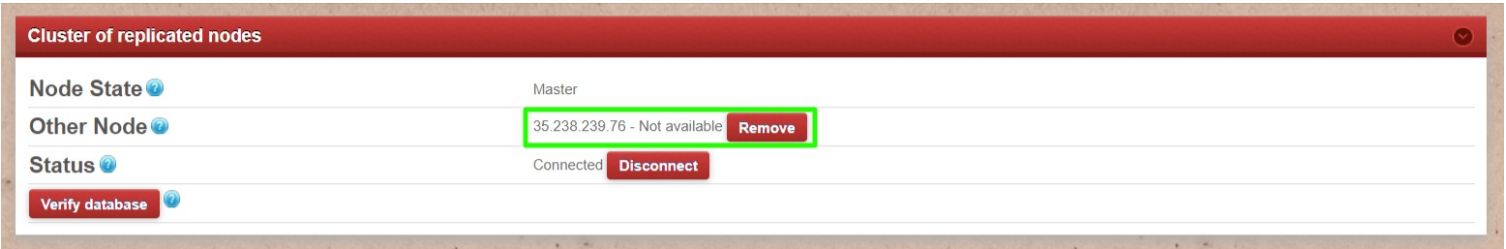

Step 1(A): Verify if the secondary node has been installed with the correct IP address. If the IP address is incorrect, run the following command on the secondary node with the correct IP of the secondary node to reinstall the slave.

```
root@secondary:~# sh ezlogin_7.x.x.bin -- -secondary <ip_addr of secondary node> -othernode <ip_addr of master node>
```

Step 1(B): Ensure that MySQL port 3306 is open and MySQL is running on both nodes. Run below command to check if MySQL is listening on port 3306.

```
netstat -nltp | grep 3306

systemctl status mysql
```

Step 1(C): Verify that there is MySQL connection between the primary and secondary nodes, as well as between the secondary and primary nodes. Run below commands to check the MySQL connection.

Database credentials:
Host: localhost
Port/Socket: /var/lib/mysql/mysql.sock
Database: ezlogin_phmxgg
Username: ezlogin_pyy
Password: P4&][*V]Qx3jn3n7A6@p6p7]G
Table Prefix: vbsrc_

After getting the [database credentials](#) run the below command to check MySQL connection between primary and secondary nodes.

Run below command on primary node:

```
root@primary:~# mysql -h secondary_server_ip -u db_username -p
```

Run below command on secondary node:

```
root@secondary:~# mysql -h primary_server_ip -u db_username -p
```

Step 2(C): Execute the following command on the secondary server to grant access to the Ezeelogin database from the primary server.

```
root@secondary:~# php /usr/local/ezlogin/grant_host.php <ip_address of primary node/master>
```

Step 2(D): Check for the error messages in the [application logs](#) on the primary server. Run the following command to navigate to the log directory and tail the latest log.

```
root@primary:~# cd $(awk '/^system_folder/ {print $2}' /usr/local/etc/ezlogin/ez.conf)/application/logs/
```

For Example:

```
root@primary:/var/www/ezlogin/application/logs# tail log-2024-07-11.php
```

Related Articles:

[Install slave / secondary node for high availability in jump server](#)

[Primary node showing the public ip instead of lan ip when cluster is configured](#)

Online URL: <https://www.ezeelogin.com/kb/article/could-not-connect-to-other-node-database-728.html>